




---

**B B**



5 201203  
400-061-5118 +86-021-5031 0528  
+86-15800765605  
58 361796650  
: @ .

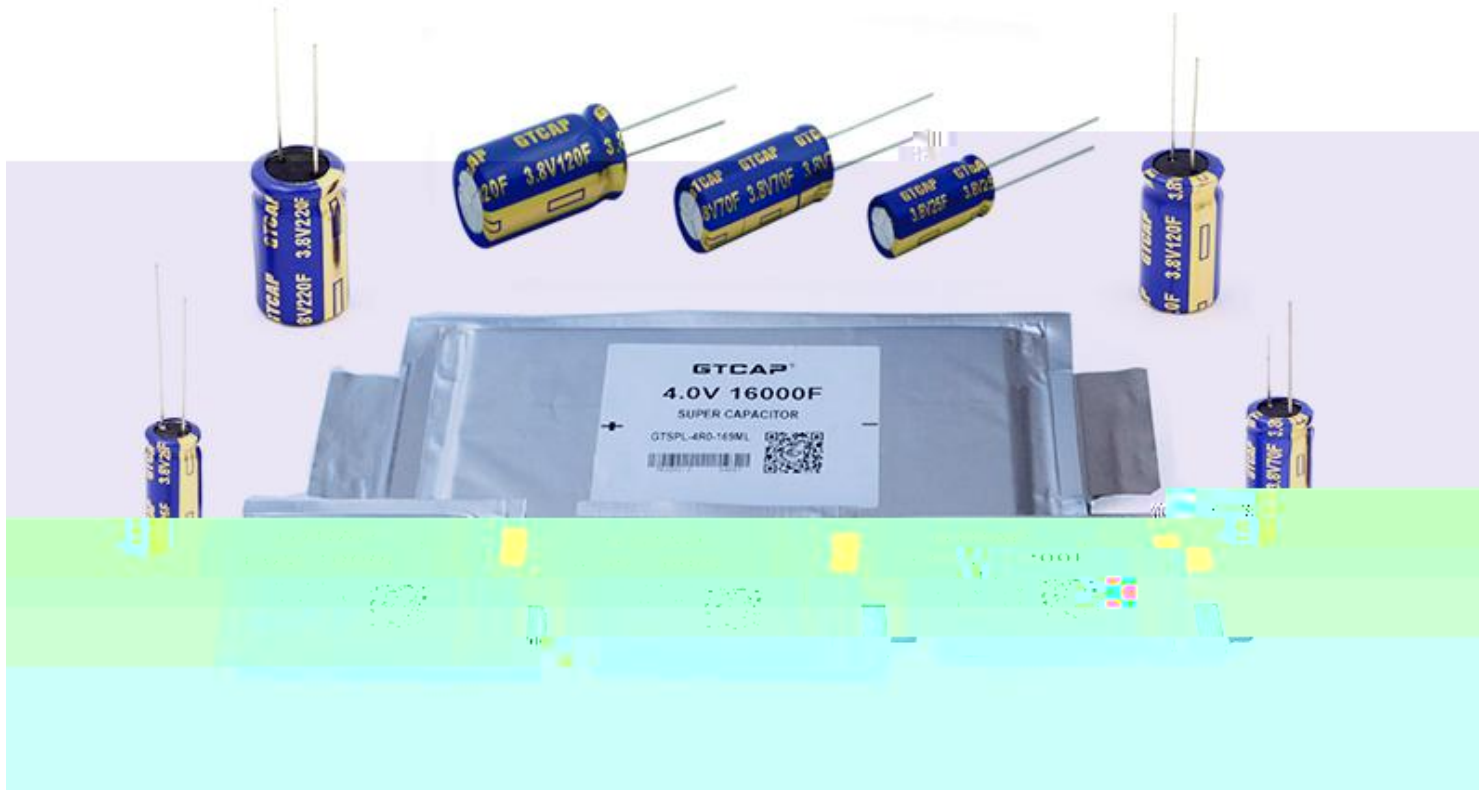

G CA

EDLC


: G L-3 8-706 L 1000 C

| G    |    |     |     |     |       |     |          |   |   |    |
|------|----|-----|-----|-----|-------|-----|----------|---|---|----|
| G CA |    |     |     |     |       | (F) |          |   |   |    |
|      |    | 2 5 | 2.5 | 104 | 0.1   | J   | 5%       | A |   | =  |
|      | E  | 2 7 | 2.7 | 224 | 0.22  | K   | 10%      | B |   | C= |
|      |    | 3 3 | 3.3 | 474 | 0.47  |     | 20%      | C | C | =  |
|      |    | 3 6 | 3.6 | 105 | 1.0   |     | -10% 20% | H |   | =  |
|      | H  | 3 8 | 3.8 | 205 | 2.0   |     | 10% 30%  | L |   |    |
|      | EH | 4 0 | 4.0 | 475 | 4.7   |     | -20% 80% |   |   |    |
|      | H  | 5 0 | 5.0 | 106 | 10    |     |          |   |   |    |
|      | L  | 5 5 | 5.5 | 206 | 20    |     |          |   |   |    |
|      | L  | 6 3 | 6.3 | 506 | 50    |     |          |   |   |    |
|      | G  | 012 | 12  | 107 | 100   |     |          |   |   |    |
|      |    | 016 | 16  | 367 | 360   |     |          |   |   |    |
|      |    | 024 | 24  | 407 | 400   |     |          |   |   |    |
|      |    | 036 | 36  | 657 | 650   |     |          |   |   |    |
|      |    | 048 | 48  | 158 | 1500  |     |          |   |   |    |
|      |    | 056 | 56  | 308 | 3000  |     |          |   |   |    |
|      |    | 075 | 75  | 508 | 5000  |     |          |   |   |    |
|      |    | 100 | 100 | 908 | 9000  |     |          |   |   |    |
|      |    | 120 | 120 | 109 | 10000 |     |          |   |   |    |
|      |    | 240 | 240 | 119 | 11000 |     |          |   |   |    |
|      |    |     |     | 169 | 16000 |     |          |   |   |    |
|      |    |     |     | 189 | 18000 |     |          |   |   |    |
|      |    |     |     | 609 | 60000 |     |          |   |   |    |
|      |    |     |     | 909 | 90000 |     |          |   |   |    |




## 替代电池用


例如：应用在太阳能道钉灯、警示灯和墙壁灯中，GTCAP混合超级电容器可替代电池作为储能元件，体积小，自放电少，可长时间保持能量，其超长循环寿命可以使设备免维护。

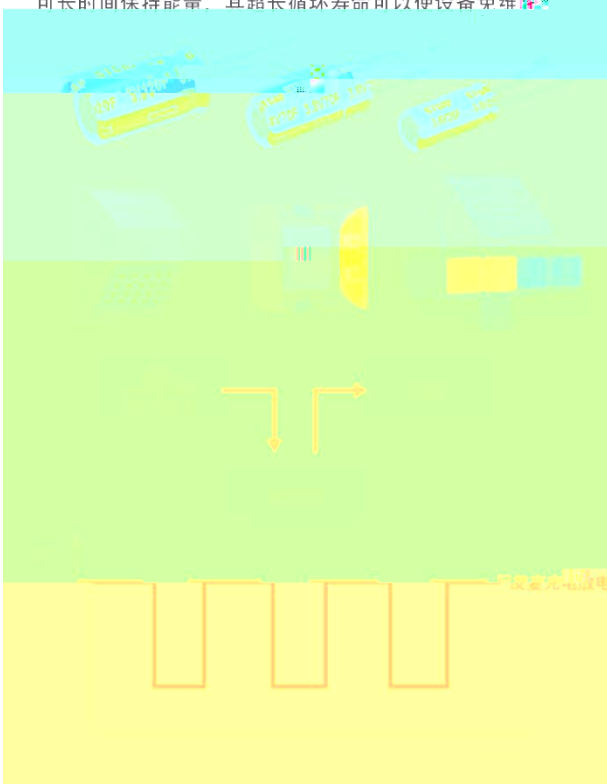

## 后备电源

例如：作为行车记录仪的后备电源，在切断主要电源供电时，GTCAP混合超级电容器可以瞬间输出电力支撑。

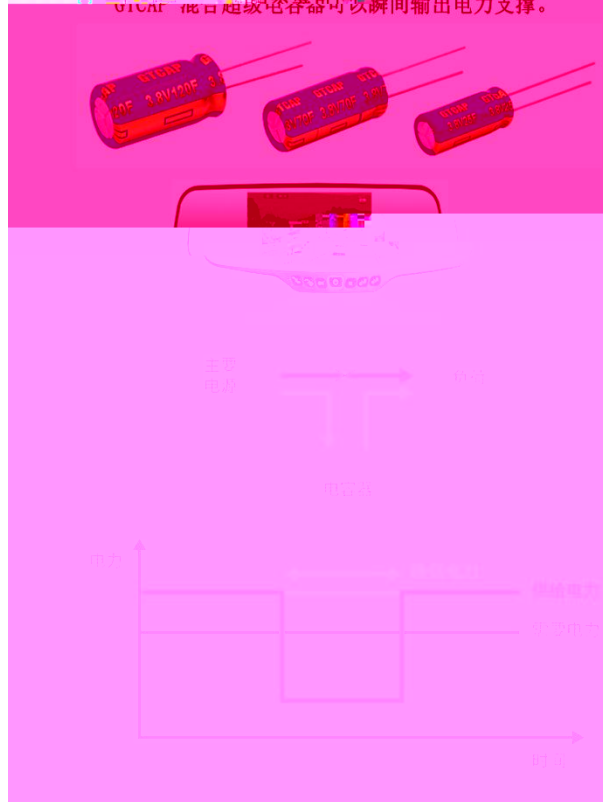

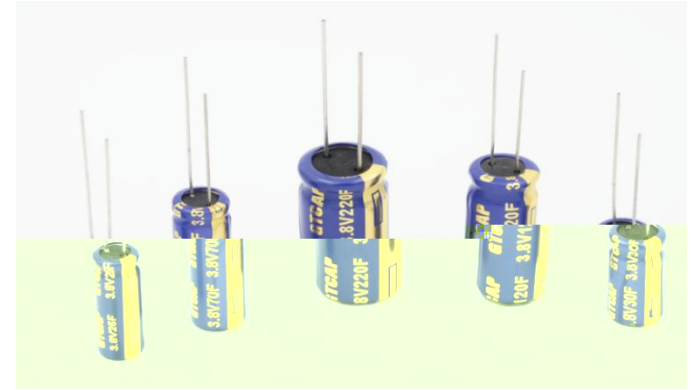

- ◇ : 4.0 2.5
- ◇ : 50,000
- ◇ : -25 +55
- ◇

:



|   |             | ( ) | ( )  | (F)  | E ( ) |        | DCL   | 72    | (A) | (A) | (A) | ( / )      | ( ) | ( ) |
|---|-------------|-----|------|------|-------|--------|-------|-------|-----|-----|-----|------------|-----|-----|
|   |             | ( ) | ( )  | (F)  | DC    | AC/1KH | ( A ) | ( A ) | (A) | (A) | (A) | ( / )      | ( ) | ( ) |
| G | L-4 0-108 L | 4.0 | 4.35 | 1000 | 20    | 9      | 0.24  | 3.92  | 5.0 | 20  | 27  | 100 71 3   | 15  |     |
| G | L-4 0-208 L | 4.0 | 4.35 | 2000 | 9     | 5      | 0.295 | 3.92  | 10  | 30  | 50  | 100 71 5.5 | 15  |     |
| G | L-4 0-328 L | 4.0 | 4.35 | 3200 | 5.5   | 3      | 0.335 | 3.92  | 16  | 40  | 78  | 100 65 9.0 | 15  |     |

- ◇ : 4.0 2.5
- ◇ : 50,000
- ◇ : -25 +55
- ◇

:



|   |             | ( ) | ( )  | (F)   | E ( )     |     | DCL ( A) | 72 ( A) | (A) | (A) | ( / ) | ( )         | ( ) |
|---|-------------|-----|------|-------|-----------|-----|----------|---------|-----|-----|-------|-------------|-----|
|   |             |     |      |       | DC AC/1KH |     |          |         |     |     |       |             |     |
| G | L-4 0-608 L | 4.0 | 4.35 | 6000  | 3.5       | 2.5 | 0.48     | 3.92    | 30  | 100 | 165   | 295 123 3.5 | 245 |
| G | L-4 0-109 L | 4.0 | 4.35 | 10000 | 1.8       | 1.2 | 0.53     | 3.92    | 50  | 150 | 240   | 295 123 5.5 | 245 |
| G | L-4 0-169 L | 4.0 | 4.35 | 16000 | 1.2       | 1.0 | 0.58     | 3.92    | 60  | 200 | 375   | 295 123 8.0 | 245 |